

**DISCLAIMER FOR FRONT PAGE OF MATERIALS TO BE MADE AVAILABLE VIA ETI INTERNET SITE**

1. "Save to the extent set out in paragraph 2 below, this document and its contents are made available to you via the ETI's Internet Site "as is" without any representations, conditions, warranties or other assurance of any kind. The ETI and the authors, together with their employees, directors, servants or agents exclude to the maximum extent permissible by law all representations, warranties, conditions or other assurance whatsoever (whether express or implied) regarding the use of this document or its content including any warranties of title, merchantability, accuracy, completeness, non-infringement or that the document or its contents are of satisfactory or any particular quality or fit for any particular purpose. Any person accessing this document and using it or any of its contents accepts all risk in doing so.
2. Notwithstanding any statement to the contrary contained on the face of this document, the ETI confirms that the authors of the document have consented to its publication by the ETI."

# ReDAPT – Reliable Data Acquisition Platform for Tidal



## *Work Package ME8: Antifouling systems for tidal energy devices*

Tim Fileman & Tom Vance  
Plymouth Marine Laboratory



© 2015 Tidal Generation Ltd

This document contains information which is proprietary and confidential to Tidal Generation Ltd provided under the TECHNOLOGY CONTRACT FOR REDAPT PROJECT dated 28th July 2010, which may not, without the prior written consent of Tidal Generation Ltd, be used or reproduced, in whole or in part, or communicated to any person not employed by the Energy Technologies Institute LLP, Tidal Generation Ltd, E.ON Engineering Limited, Electricite de France SA, Garrad Hassan & Partners Limited, The University Court of the University of Edinburgh, The European Marine Energy Centre Limited and/or Plymouth Marine Laboratory.

This information is given in good faith based upon the latest information available to Tidal Generation Ltd, no warranty or representation is given concerning such information, which must not be taken as establishing any contractual or other commitment binding upon Tidal Generation Ltd or any of its subsidiary or associated companies.

# Work Package ME8: Anti fouling systems for tidal energy devices

1. To develop a protocol for identifying optimum anti-fouling systems (biofouling management) for tidal and wave energy devices and critical associated infrastructure (ME8.1)
2. Technical literature review and consultation with device developers (ME8.2)
3. Development of experimental design, construction and deployment of test arrays (ME8.3)
4. Deploy arrays, monitor biofouling (ME8.4)
5. Synthesis of results & report (ME8.5)




# Broad Aims

- Develop an experimental design and infrastructure to secure statistically robust outcome
- Characterised fouling potential at the site
- Identify leading coatings products and assess their performance and robustness
- Develop recommendations for optimum protocol for biofouling management and selecting antifouling coatings
- Ultimately to help to de-risk and improve reliability of renewable energy devices



# Design Stage

- Design stage critical:
  - How to mount & demount panels on the turbine
  - Experimental design e.g. statistical replication, redundancy etc.
  - Minimising risk of lost experiments – losing panels, pods etc
  - Safety

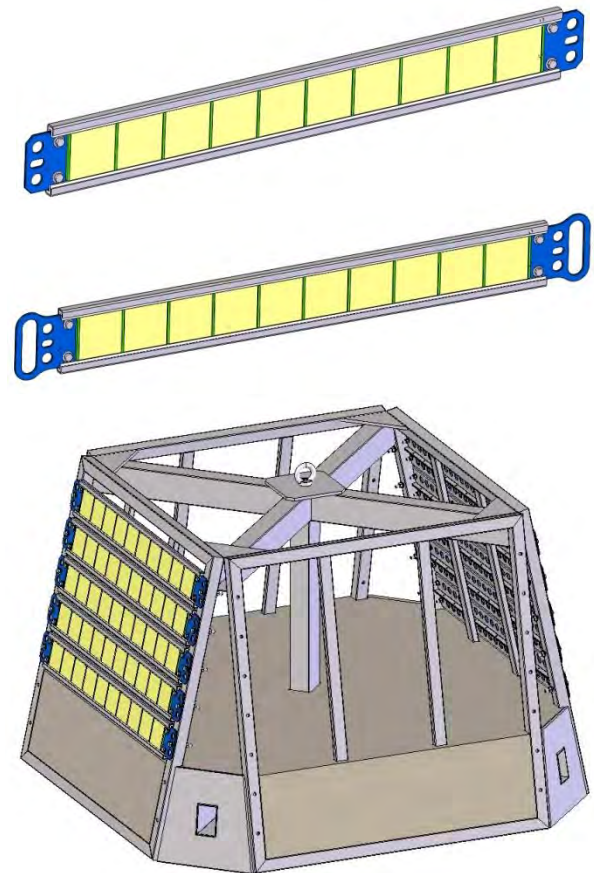



# Coating Test List

- Range of antifouling and protective coatings
- Includes biocidal, FRC and epoxy based technologies
- Applicable to different components, materials and budgets.




Manufacturer	Brand	Technology Type	Anticorrosive (DFT info supplied by manufacturer)	Tie Coat	Top Coat (DFT info supplied by manufacturer)	Pre-test Total Dry Film Thickness	Notes
Hempel	Hempasil	Fouling Release	Multi-strength 457751-12340 (DFT 250µm)	Nexus 27302-55001	Hempasil Topcoat	~1000µm	Manufacturer applied
International	Not supplied	Fouling Release	Aluminium pure epoxy (150µm x 2 coatings)	Silicone Tie coat 100µm	Flouropolymer Antifouling 150µm	~550 µm	Manufacturer applied
Coppercoat	Coppercoat	Biocidal copper filled epoxy resin	GP120 (DFT 250-300µm)	N/A	Coppercoat (DFT 250 – 300µm)	~350µm	Manufacturer applied
Jotun	Seaquantum Ultra	Self polishing biocidal	Jotamastic 87	Safeguard Universal AS	Seaquantum Ultra	~600µm	Manufacturer applied
International	Not supplied	Not supplied	Not supplied	Not supplied	Not supplied	~550 µm	Manufacturer applied
Plastimo	Plastimo Classic	Self polishing biocidal	Primocon (see below for details)	N/A	Plastimo Classic	~180µm	User Applied
International	Interzone 954	Epoxy	N/A	N/A	Interzone 954	N/A	User Applied
Jotun	Baltoflake Ecolife	styrene free, glass flake reinforced polyester	Jotamastic 87	Safeguard Universal AS	Baltoflake Ecolife	~1200µm	Manufacturer applied
Ecospeed	Ecospeed	Vinyl ester resin base, reinforced with glass platelets	N/A	N/A	Ecospeed (DFT 500µm x2 layers)	~1300µm	Manufacturer applied
International	Primocon	Tar free quick drying primer	This product is an anticorrosive primer and was used as a control coating.	N/A	Primocon	~150µm	User Applied

# Approach 2012

- Two seabed pods deployed 200m from turbine test site – 28.05.12
  - Each pod roughly 1.3 metres cubed
  - 3.5 tonnes concrete in each pod
  - 2 panel arrays of 5 panel holders each with 10 panels
- Panels fitted to turbine - summer 2012
  - 6 panel arrays of 5 panel holders each with 10 panels



# Results: Seabed pod panels May 2014 - 24 months

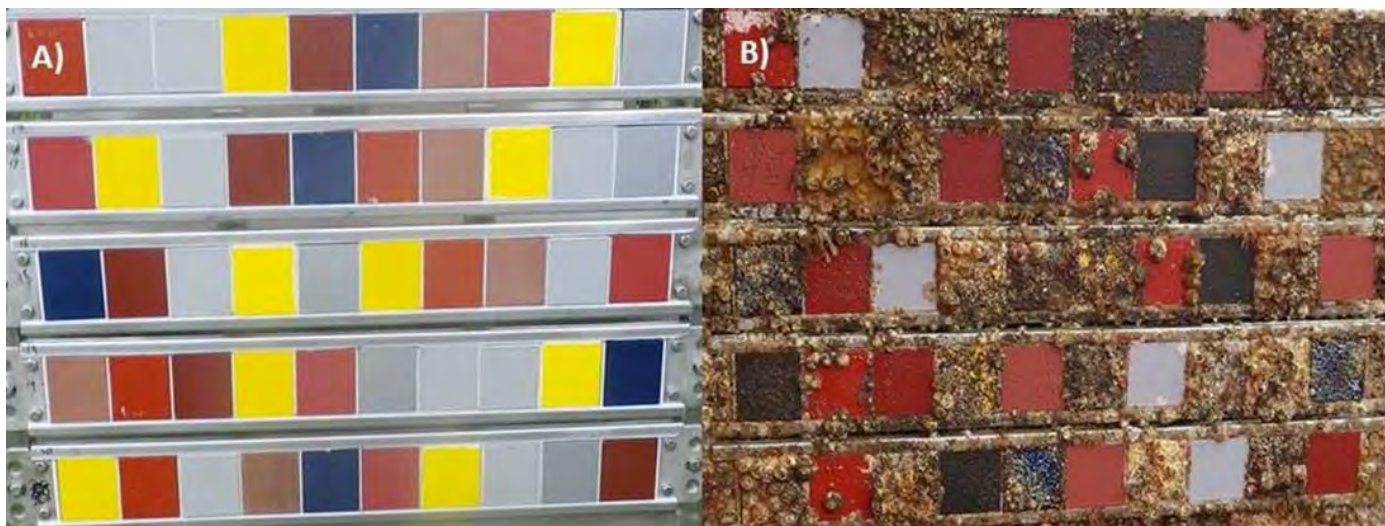

- Rig intact and all panels recovered
- Clear difference in performance
- Consistent pattern between replicates




# Results: Seabed pod panels May 2014 - 24 months

- Fouling assemblage dominated by calcareous species, notably *Chirona hameri*
- Significant damage to coatings caused by growth of individuals



*Chirona hameri* on FRC coating after 24 months

# Results: Seabed pod panels May 2014 - 24 months

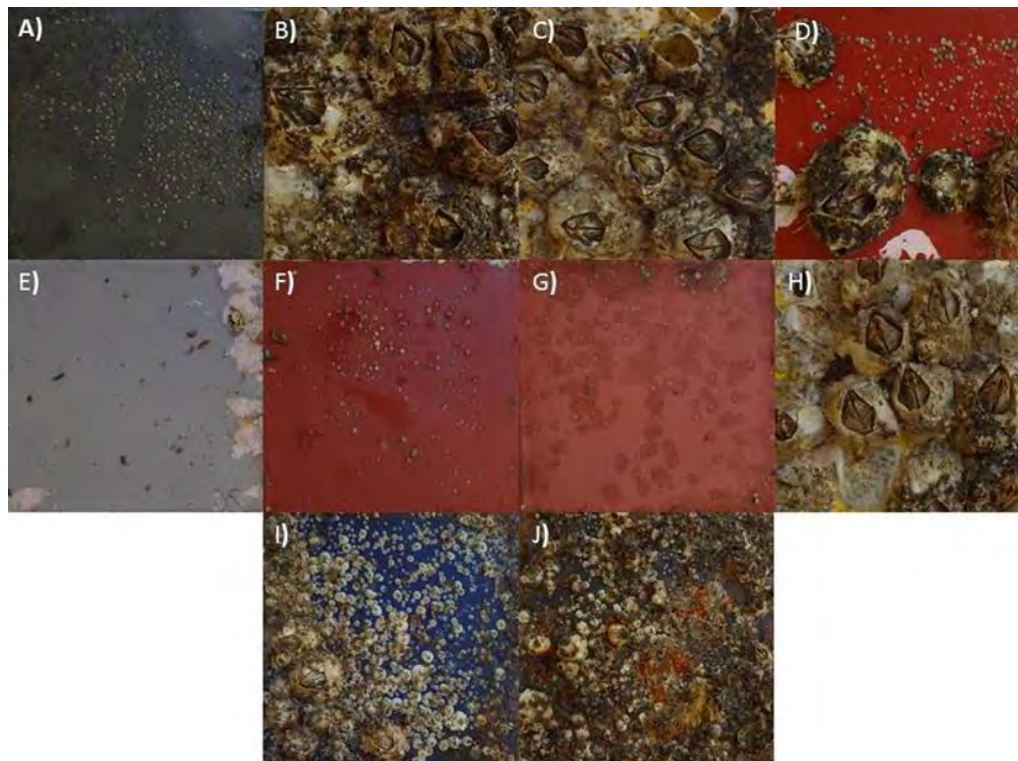

Representative image of the extent of biofouling due to panel coating type. Panel material: A) Coppercoat, B) Ecospeed, C) GRP, D) Hempel Red, E) International Grey, F) International Red, G) Jotun Red, H) Jotun Yellow, I) Pastimo AF and J) Primacon.



# Niche areas



## Niche area biofouling

- After 8 weeks – camera lens covered in barnacles
- Critical retrieval point becoming blocked (non turbine)
- Sensor performance - ADCPs



# Results: Seabed pod panels 24 months – Hydrodynamic Drag


- Considerable “roughness” or hydrodynamic drag penalty caused by hard fouling assemblage of this size and complexity
- Implications for energy conversion potential over time
- Investigating with PhD:
  - Combine with CFD models to scale effects
  - Predictive tool – differentiate between fouling penalty and other issues





# Results: Seabed pod panels 24 months - Corrosion

Pit corrosion on 5mm thick 316 marine grade stainless steel after a 24 month exposure in the tidal stream.

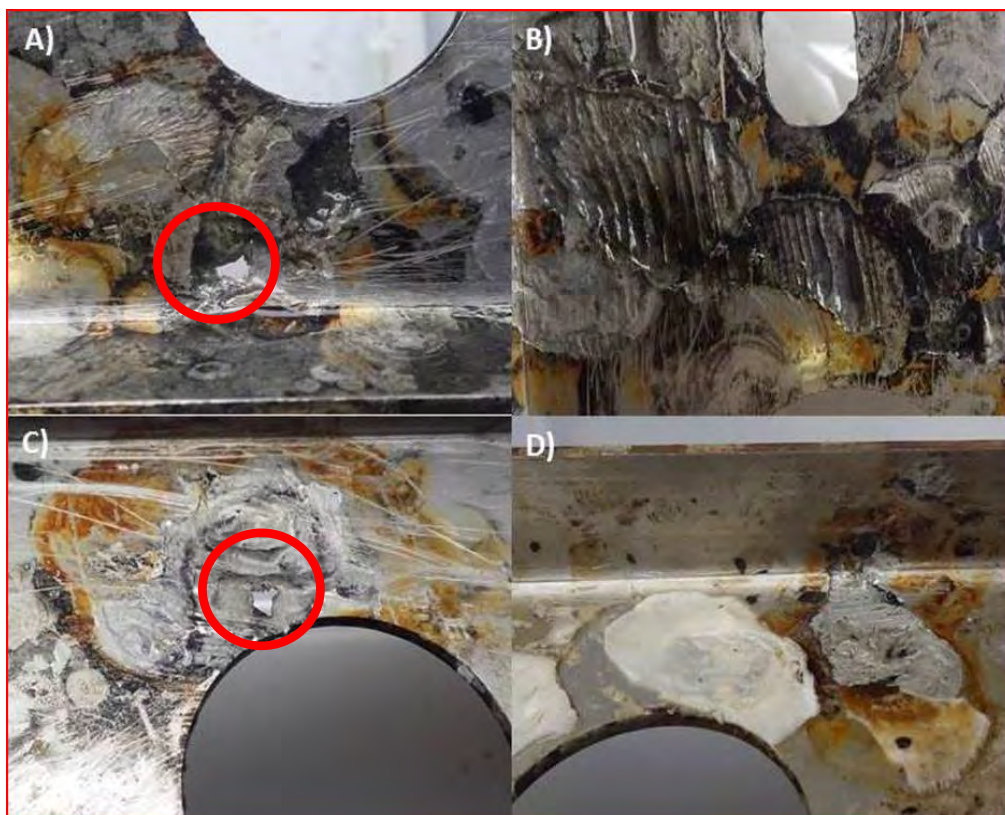


- Holes in 5mm & 6mm thick marine grade 316 SS after 2 years
- Approx 3mm loss per year – (Conservative estimate due to barnacle growth not being significant until second year)
- More likely to be .....4mm (or possibly even 5) per year?!
- Bio-corrosion requires more research




# Results: Which coating?

- FRCs very good until mechanical damage occurs - conflict with other reports of FRC performance
- FRCs for niche areas, new technologies.
- Hard epoxy coatings fouled readily, but can be cleaned and resist corrosion damage
- Hard biocidal (SPC) coatings appear best overall, but longevity is not clear – further testing underway
- Hard biocidal coatings designed for 5 year cycle on commercial vessels, not 7+ years in a tidal stream!
- No silver bullet. Match coating to application - selection guide in final ME8.5 report

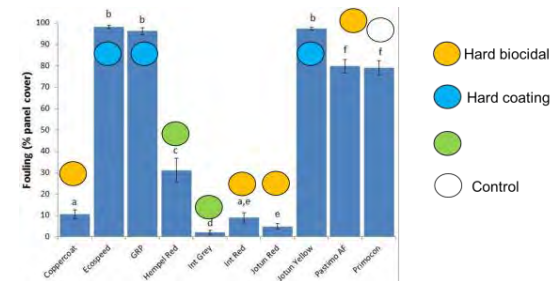

**Antifouling performance**

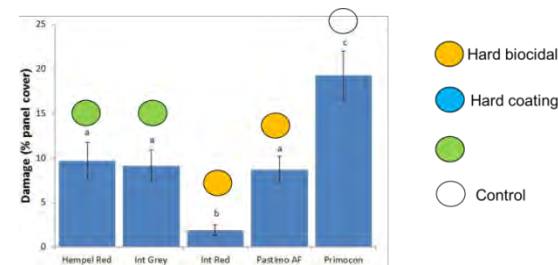

**Damage resistance**

# Achievements

- Characterised fouling potential at the site.
- Biofouling needs consideration from design stage
- Highlighted coating selection requirement
- Niche areas awareness - instrument susceptibility
- **Big step forward to de-risk and improve reliability of renewable energy devices.**



# Take Home Messages & Lessons Learned

- Increasing scrutiny of biosecurity risks and hence infrastructure movements
- As industry moves from prototype to arrays, device reliability, asset maintenance and biofouling management will become critical.
- Consider biofouling from the design stage!
  - Conduct a desk based review to identify high risk areas or processes
  - Consider what each component requires for biofouling management
  - Are active antifouling methods suitable and compatible with coating systems?
  - Budget for biofouling management with coating compatible methods



# Next Steps

- Reach a coating testing period that matches maintenance schedule aspirations for tidal turbines, 5 – 7 years (EDF funded 3 year extension to ReDAPT testing at EMEC)
- Investigate combinations of active and coating based antifouling for niche areas. Electro-chlorination, U.V., Ultrasonic etc.
- Research and characterise drag penalties from biofouling assemblages.
- Fully understand corrosion mechanisms – design specifications
- Work on optimum cleaning schedules and procedures to minimise drag without damaging coatings.



# Further Information

- Please see ME8.5 Report (<http://www.eti.co.uk/project/redapt/>) or call us on 01752 633412 or e-mail Dr Tom Vance on [thva@pml.ac.uk](mailto:thva@pml.ac.uk)





Thank you for listening. Any questions?

Tim Fileman      Tom Vance  
07818 402631 & 07867 525735  
[twf@pml.ac.uk](mailto:twf@pml.ac.uk)      [thva@pml.ac.uk](mailto:thva@pml.ac.uk)

Plymouth Marine Laboratory &  
PML Applications Ltd  
Prospect Place  
Plymouth  
PL1 3DH  
UK

Office: 01752 633412